




Drill Bits

Application: for Metal

- Fully ground, straight shank
- Amber & black finishing
- Material HSS 9341 for the whole drill bit
- 135° Split point for better drilling and outlet of swarves
- Steady drilling without run out
- High durability to breaking
- Hardness 62-66 HRC
- Type of spiral - N
- Standard DIN 338
- Class of drilling punctuality - A1
- Application: for drilling in alloyed and non-alloyed carbon steel, non-ferrous metals, plastic

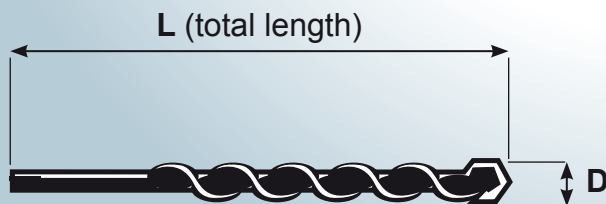

Cat. №	Diameter (D), mm	Total length (L), mm	Pcs/Pack
Standard version:			
20009280401	1.5	40	2
20009280501	2.0	49	2
20009280601	2.5	57	2
20009280701	3.0	61	2
20009280801	3.2	65	2
20009280901	3.5	70	2
20009280000	4.0	75	1
20009281000	4.2	75	1
20009281100	4.5	80	1
20009281200	4.8	86	1
20009281300	5.0	86	1
20009281400	5.5	93	1
20009280100	6.0	93	1
20009281500	6.5	101	1
20009280200	8.0	117	1
20009281600	8.5	117	1
20009281700	9.0	125	1
20009281800	9.5	125	1
20009280300	10.0	133	1
20009281900	11.0	142	1
20009282000	12.0	151	1
20009282100	13.0	151	1
Long version, DIN340:			
20009282201	2.0	85	2
20009282301	2.5	95	2
20009282401	3.0	100	2
20009282501	3.2	106	2
20009282601	3.5	112	2
20009282700	4.0	119	1
20009282800	4.2	119	1
20009282900	4.5	126	1
20009283000	4.8	132	1
20009283100	5.0	132	1
20009283200	5.5	139	1
20009283300	6.0	139	1
20009283400	6.5	148	1
20009283500	8.0	165	1
20009283600	9.0	175	1
20009283700	10.0	184	1
Cobalt:			
20009284001	2.0	49	2
20009284101	2.5	57	2
20009284201	3.0	61	2
20009284301	3.2	65	2
20009284401	3.5	70	2
20009284500	4.0	75	1
20009284600	4.2	75	1
20009284700	4.5	80	1
20009284800	4.8	86	1
20009284900	5.0	86	1
20009285000	5.5	93	1
20009285100	6.0	93	1
20009285200	6.5	101	1
20009285300	8.0	117	1
20009285400	8.5	117	1
20009285500	9.0	125	1
20009285600	10.0	133	1

SPARKY Power Tools GmbH

20, Leipziger Strasse

10117 Berlin, Germany

Tel.: +49 30 203916-0

Fax: +49 30 203916-66

E-mail: powertools@sparkygroup.com

www.sparkygroup.com